


Description

The New underground RainStore Tank from TITAN.

The underground RainStore will collect rainwater from the roof via the existing guttering and downpipe system on the property. The integral leaf filter will remove unwanted debris washed down from the roof, thus ensuring good quality stored water. Available in 2700, 3600 and 4500 Litres capacity.

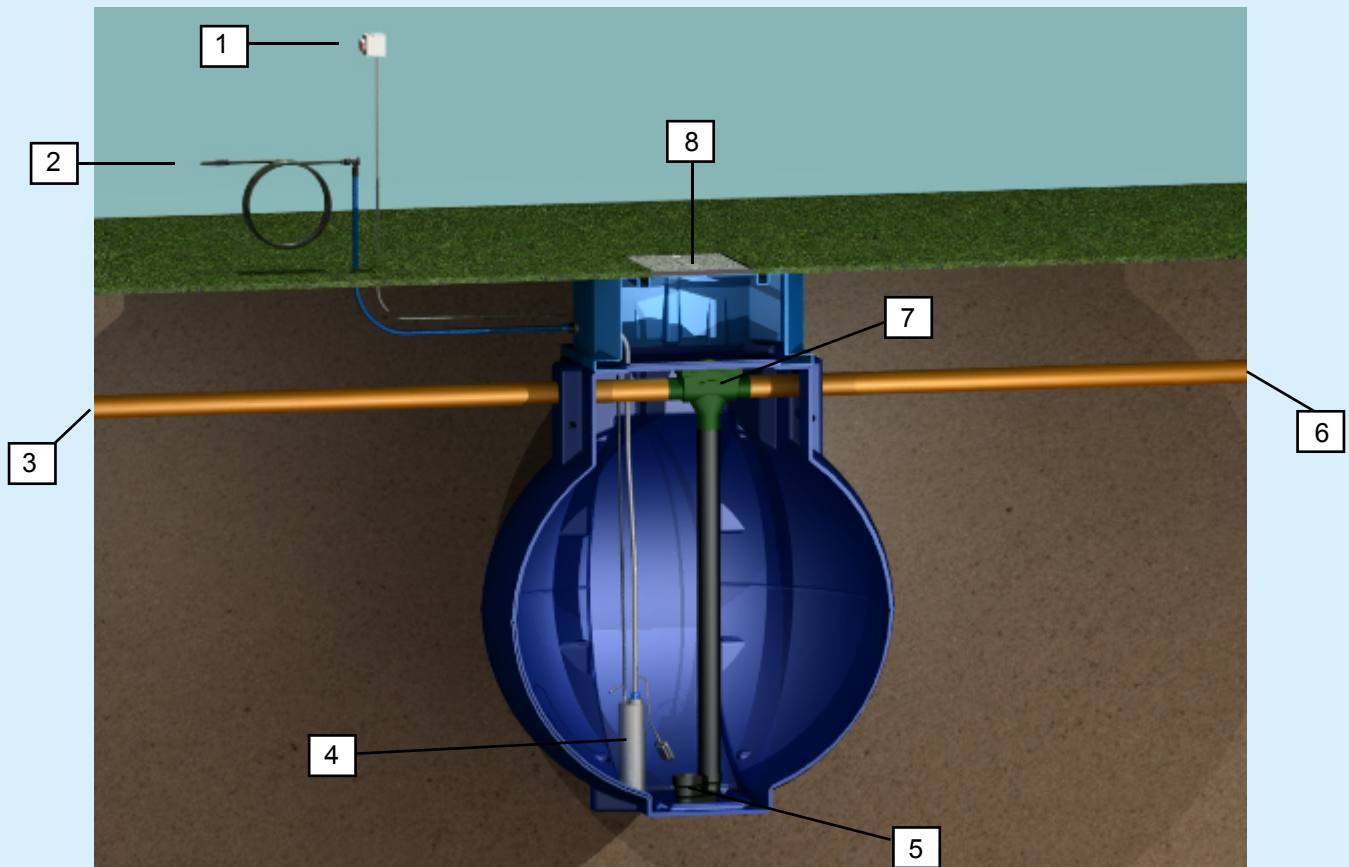

*Model shown - Underground RainStore Tank Complete with Pump and Leaf Filter (other specs available on request).

Features

1. Pump power switch.
2. Pumped water to required application, e.g garden hose, power washer, sprinkler system.
3. Rainwater Inlet (110mm).
4. Submersible Pump (See overleaf).
5. Calmed Inlet.
6. Waste Water / Overflow outlet (110mm).
7. Leaf Filter.
8. Lockable manhole lid.

Benefits


- Easy to Install
- Short pay back time
- Simple on/off operation
- Internal self-cleaning leaf filter
- Pump run dry protection
- Suitable for EXISTING and new homes
- Reduced water bills
- 2700, 3600, 4500 litre capacities - higher capacities available on request
- Silent running - pump located within the tank
- Small footprint
- Water conservation
- Environmentally sound & cost effective
- Designed and manufactured in the UK

Pump Information

Idrogo M40/08 Submersible pump can provide:

- 20 litres per minute at 43 metres head.
- 40 litres per minute at 36 metres head.
- 80 litres per minute at 13 metres head.

Average UK Mains Water is supplied at 3Bar (30metres head), i.e pump offers similar or better performance than mains water.

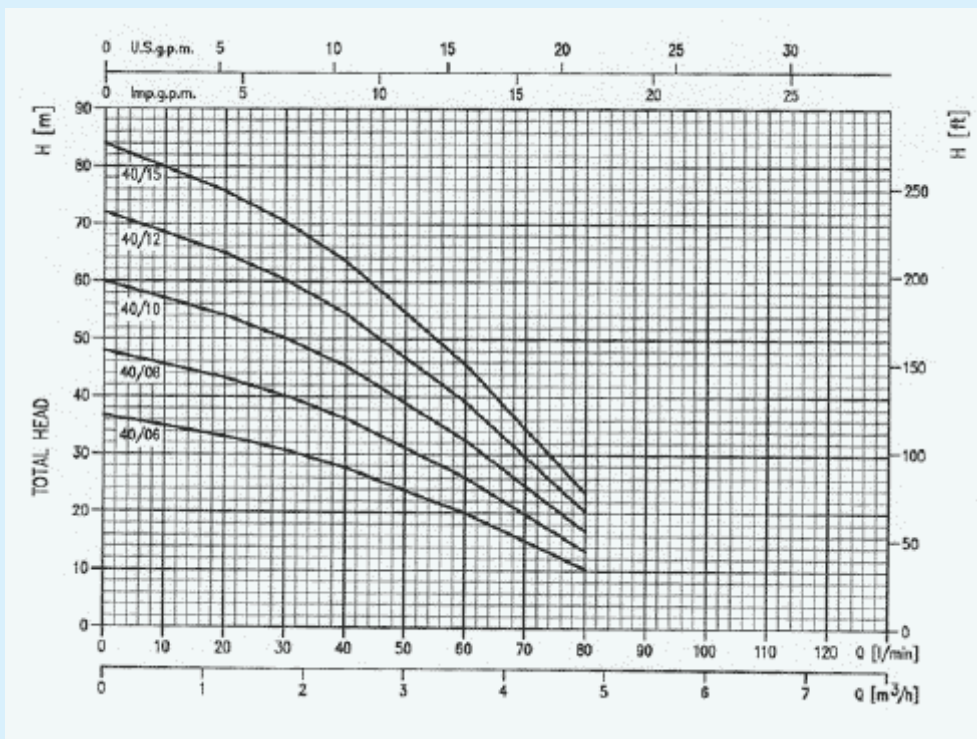

Technical Data

	URS2700	URS3600	URS4500
Capacity:	2700 Ltrs	3600 Ltrs	4500 Ltrs
Diameter:	1760mm	1940mm	2000mm
Height:	1960mm	2120mm	2370mm

Invert Depth: 650mm (Height from ground level to bottom of inlet pipe)

Example Codes:

URS2700COM - 2700 Ltrs complete with pump & leaf filter

URS2700LF - 2700 Ltrs complete with leaf filter

URS 2700T - 2700 Ltrs tank only

Guarantee Period: 1 Year



Titan Environmental Limited

Seapatrick Road, Seapatrick, Banbridge, Co Down, BT32 4PH
 Sales Hotline Tel: +44 (0) 28 4062 1420 Tel: +44 (0) 28 4062 6260
 Fax: +44 (0) 28 4062 6259 sales@titanenv.com
www.titanenv.com